



# DOOR INFORMATION

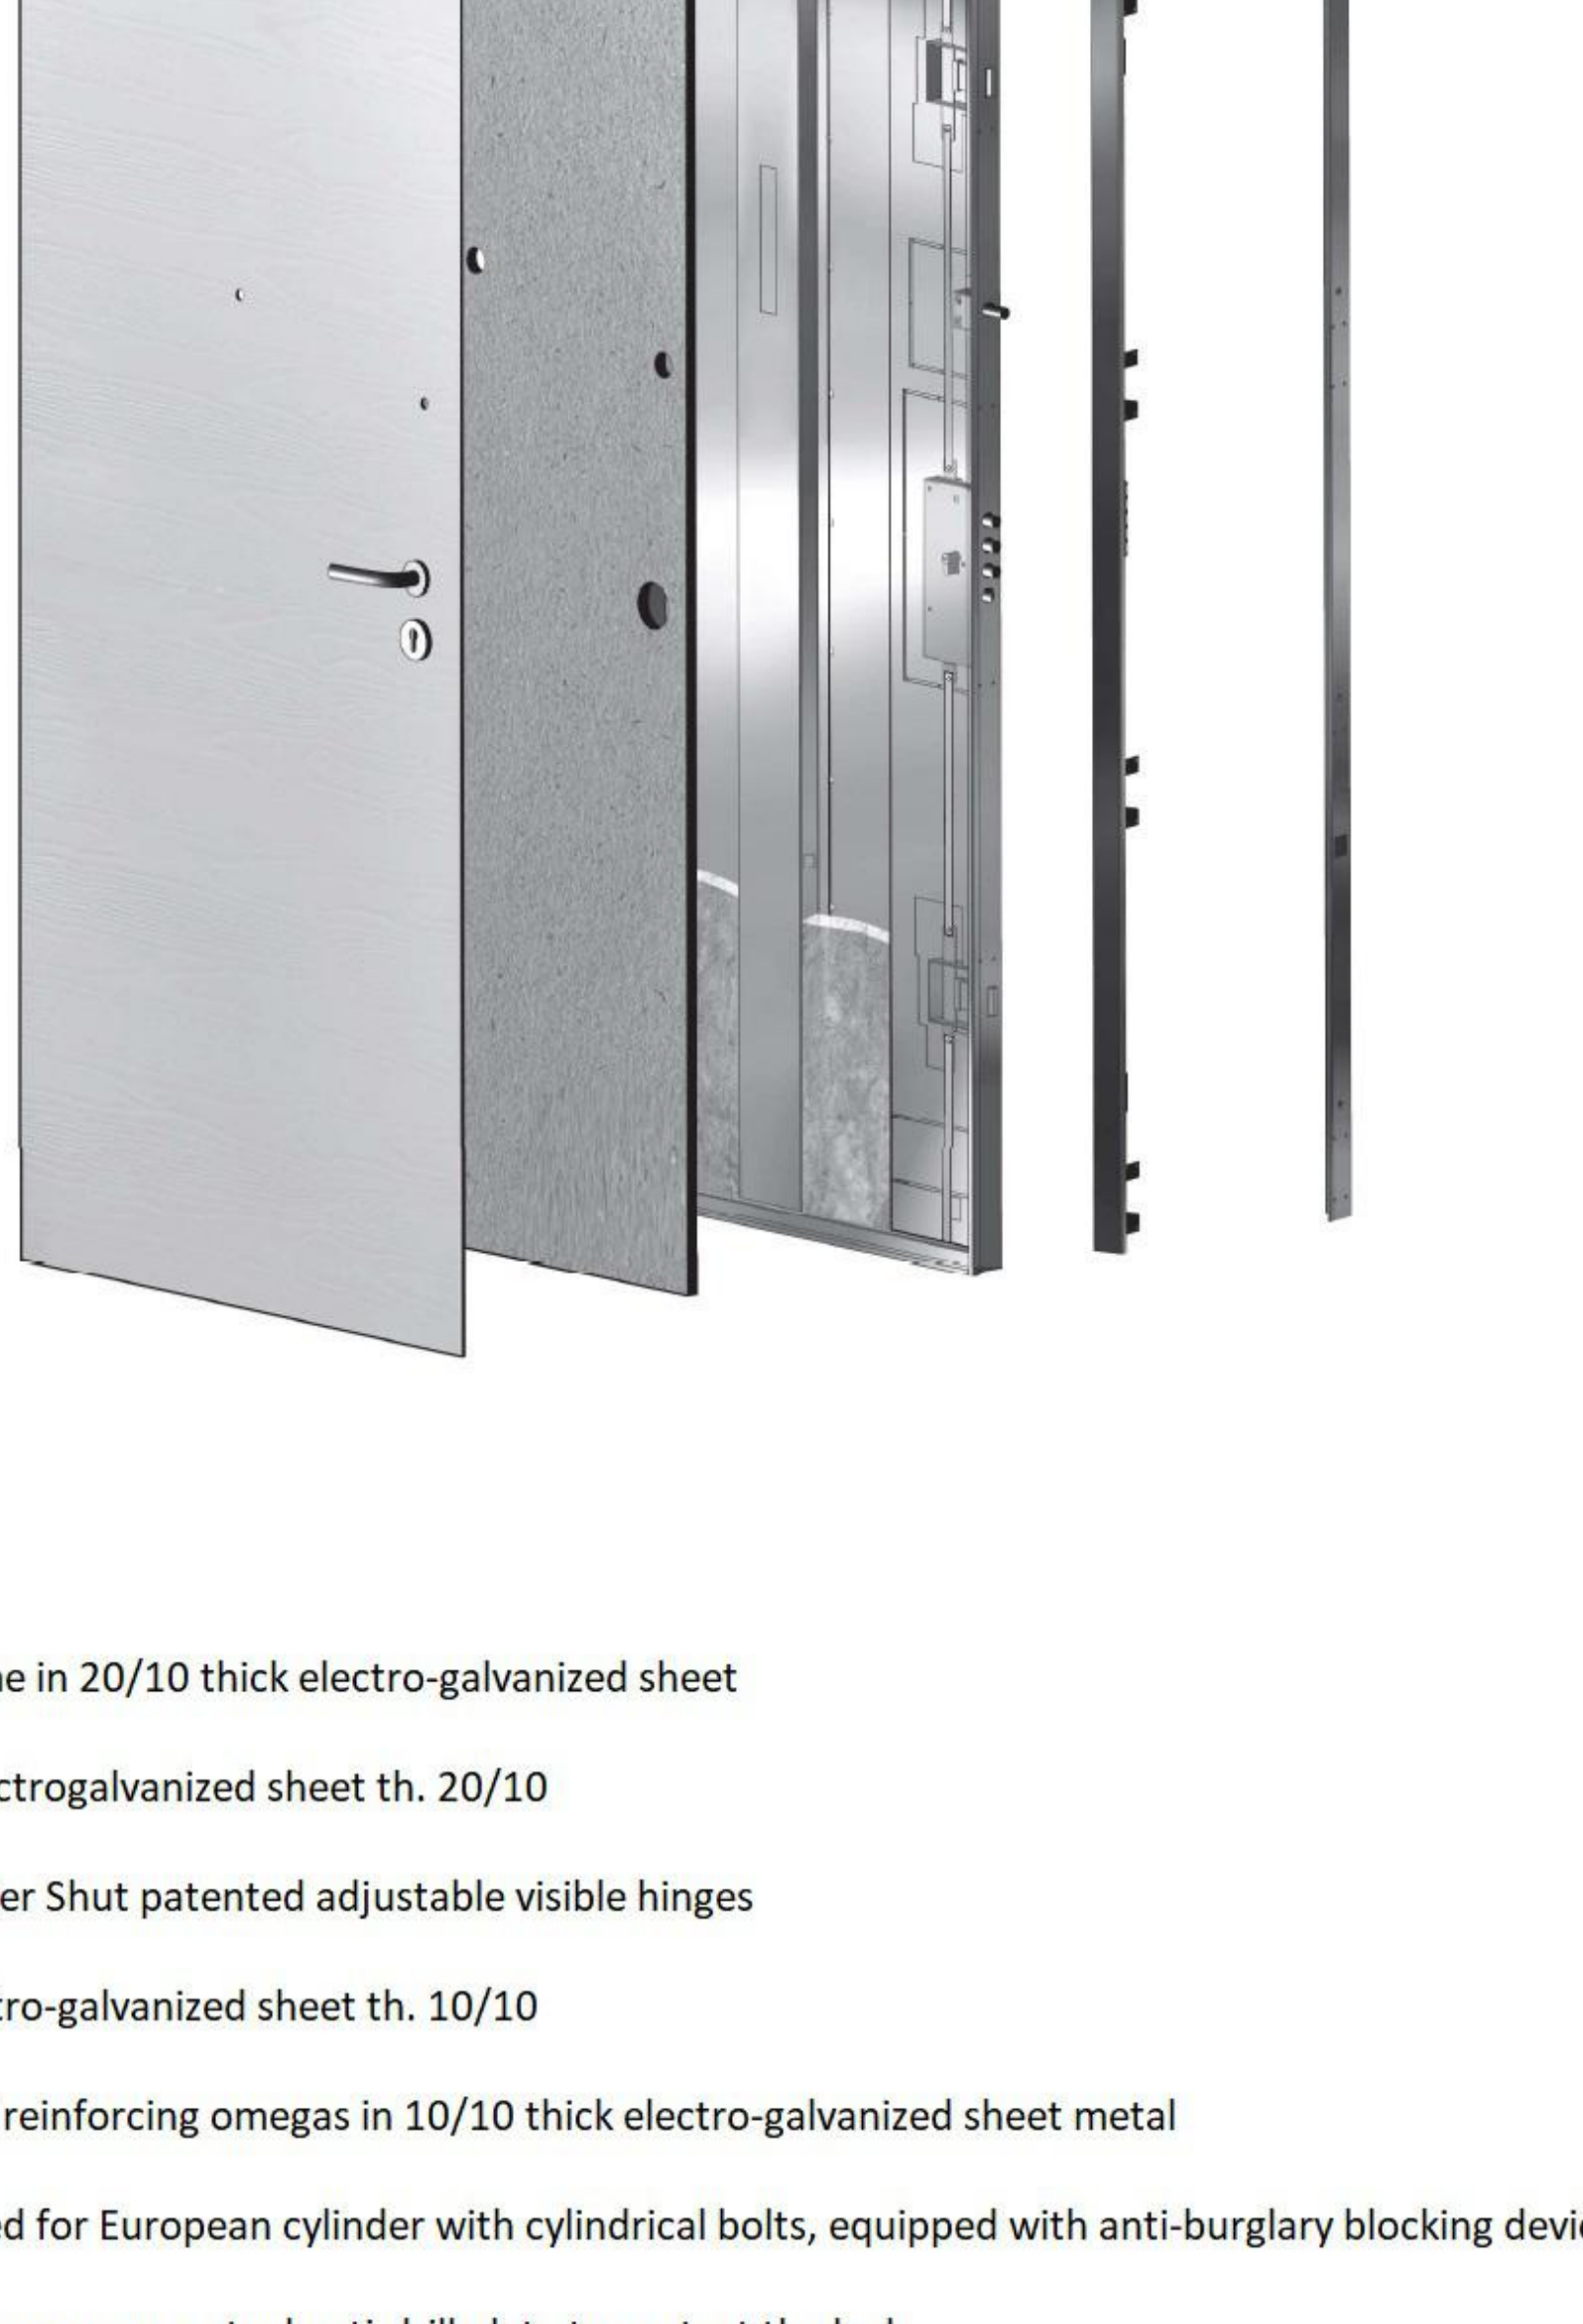

- Counterframe in 20/10 thick electro-galvanized sheet
- Frame in electrogalvanized sheet th. 20/10
- Pairs of Mister Shut patented adjustable visible hinges
- Body in electro-galvanized sheet th. 10/10
- N° 3 vertical reinforcing omegas in 10/10 thick electro-galvanized sheet metal
- Lock designed for European cylinder with cylindrical bolts, equipped with anti-burglary blocking device
- 20/10 thick manganese steel anti-drill plate to protect the lock
- External anti-pipe and anti-drill defender for cylinder
- Double rectangular diverter with anti-retraction locking device
- Three fixed bolts placed along the hinge side
- Upper closing rod
- Double perimeter gasket for greater thermo-acoustic comfort
- Insulating and sound-absorbing panels placed inside the body
- External and internal cladding panel chosen between laminate or 6 mm thick wood
- Containment trays of plastic material in correspondence with the lock, the deviators and the bolts
- Adjustable automatic lowering draft excluder
- Inner/outer panel stop guard kit in press bent sheet metal
- Internal handle, knob, lock escutcheons in silver or bronzed anodized aluminium
- Wide angle peephole
- Eight registers complete with M8 screws for fixing the frame to the subframe
- Door and frame painting carried out with a non-polluting treatment, with dark grey, chalk or black brown polyester powders which makes them more resistant to scratches and atmospheric agents



- > ANTI-BURGLAR CLASS 3 CLASS 3 CLASS 3 NPD NPD
- > THERMAL TRANSMITTANCE 1.3 W/m2K
- > SOUND INSULATION 40dB
- > AIR PERMEABILITY CLASS 3
- > RESISTANCE TO WIND LOAD C5
- > WATERPROOF 5A

## DIRECTION OF OPENING


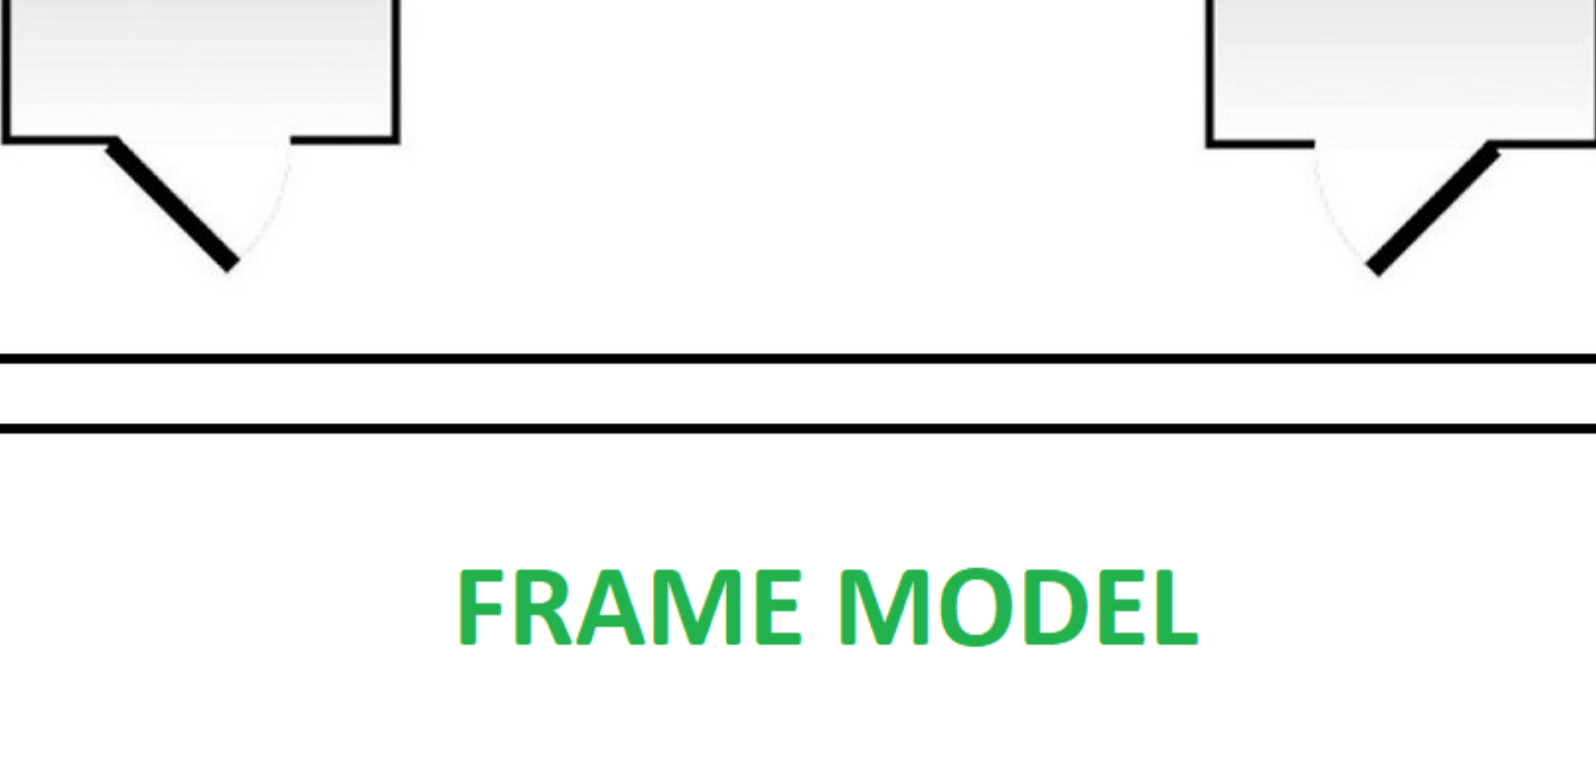


## FRAME MODEL


### DOUBLE DOOR SOLUTION

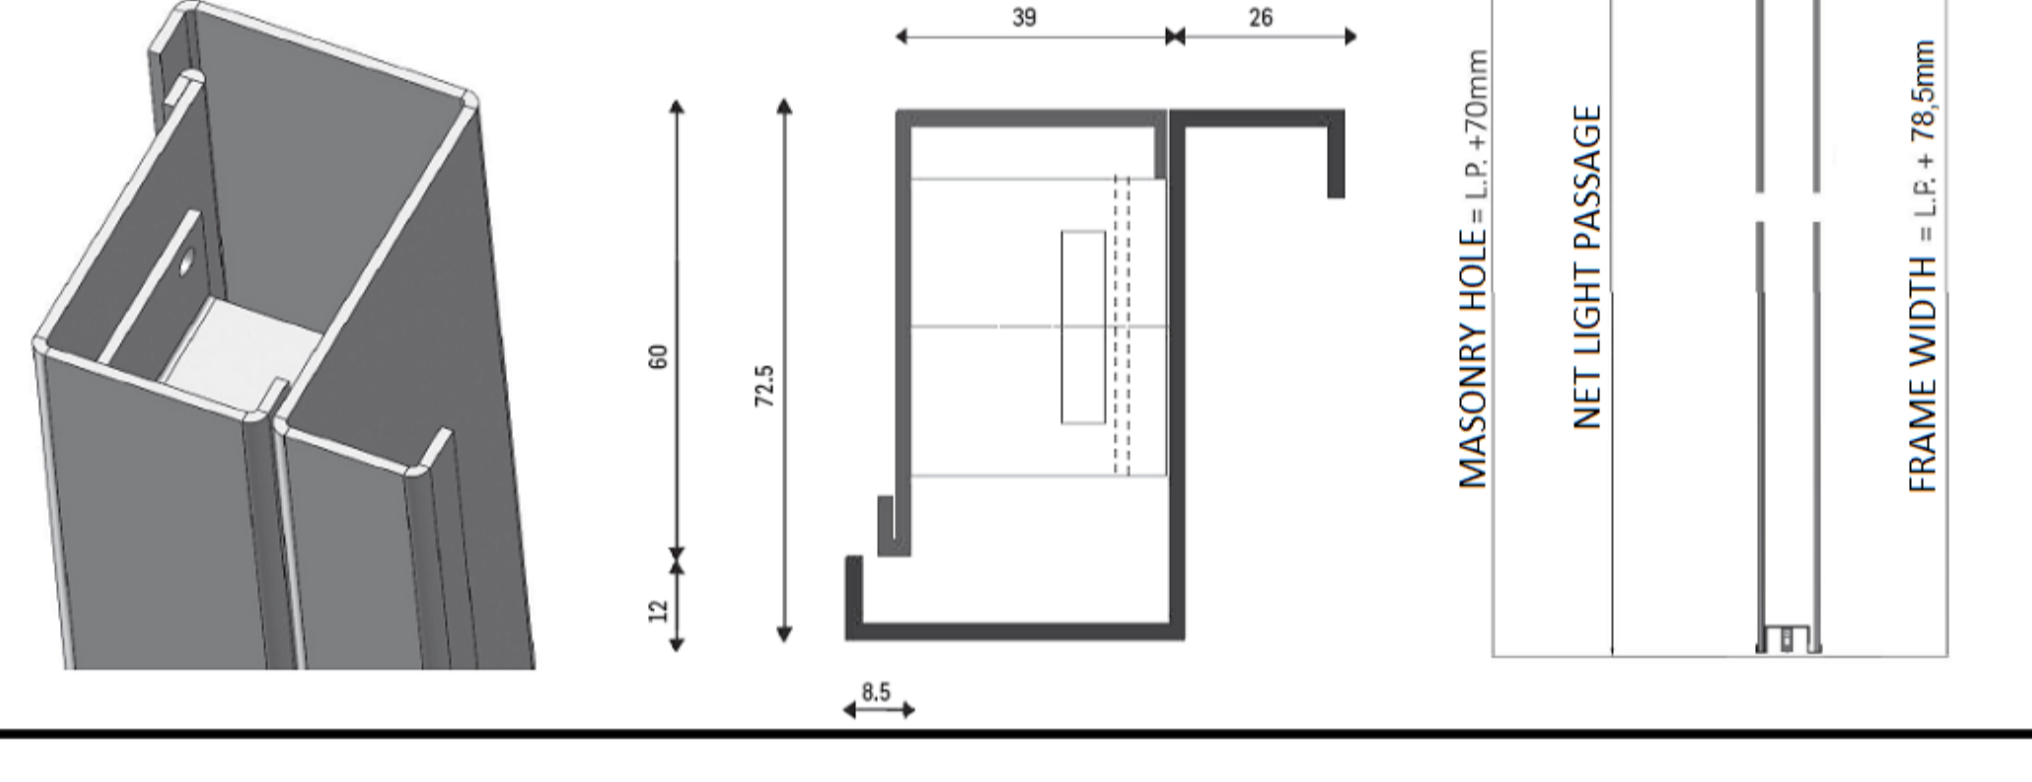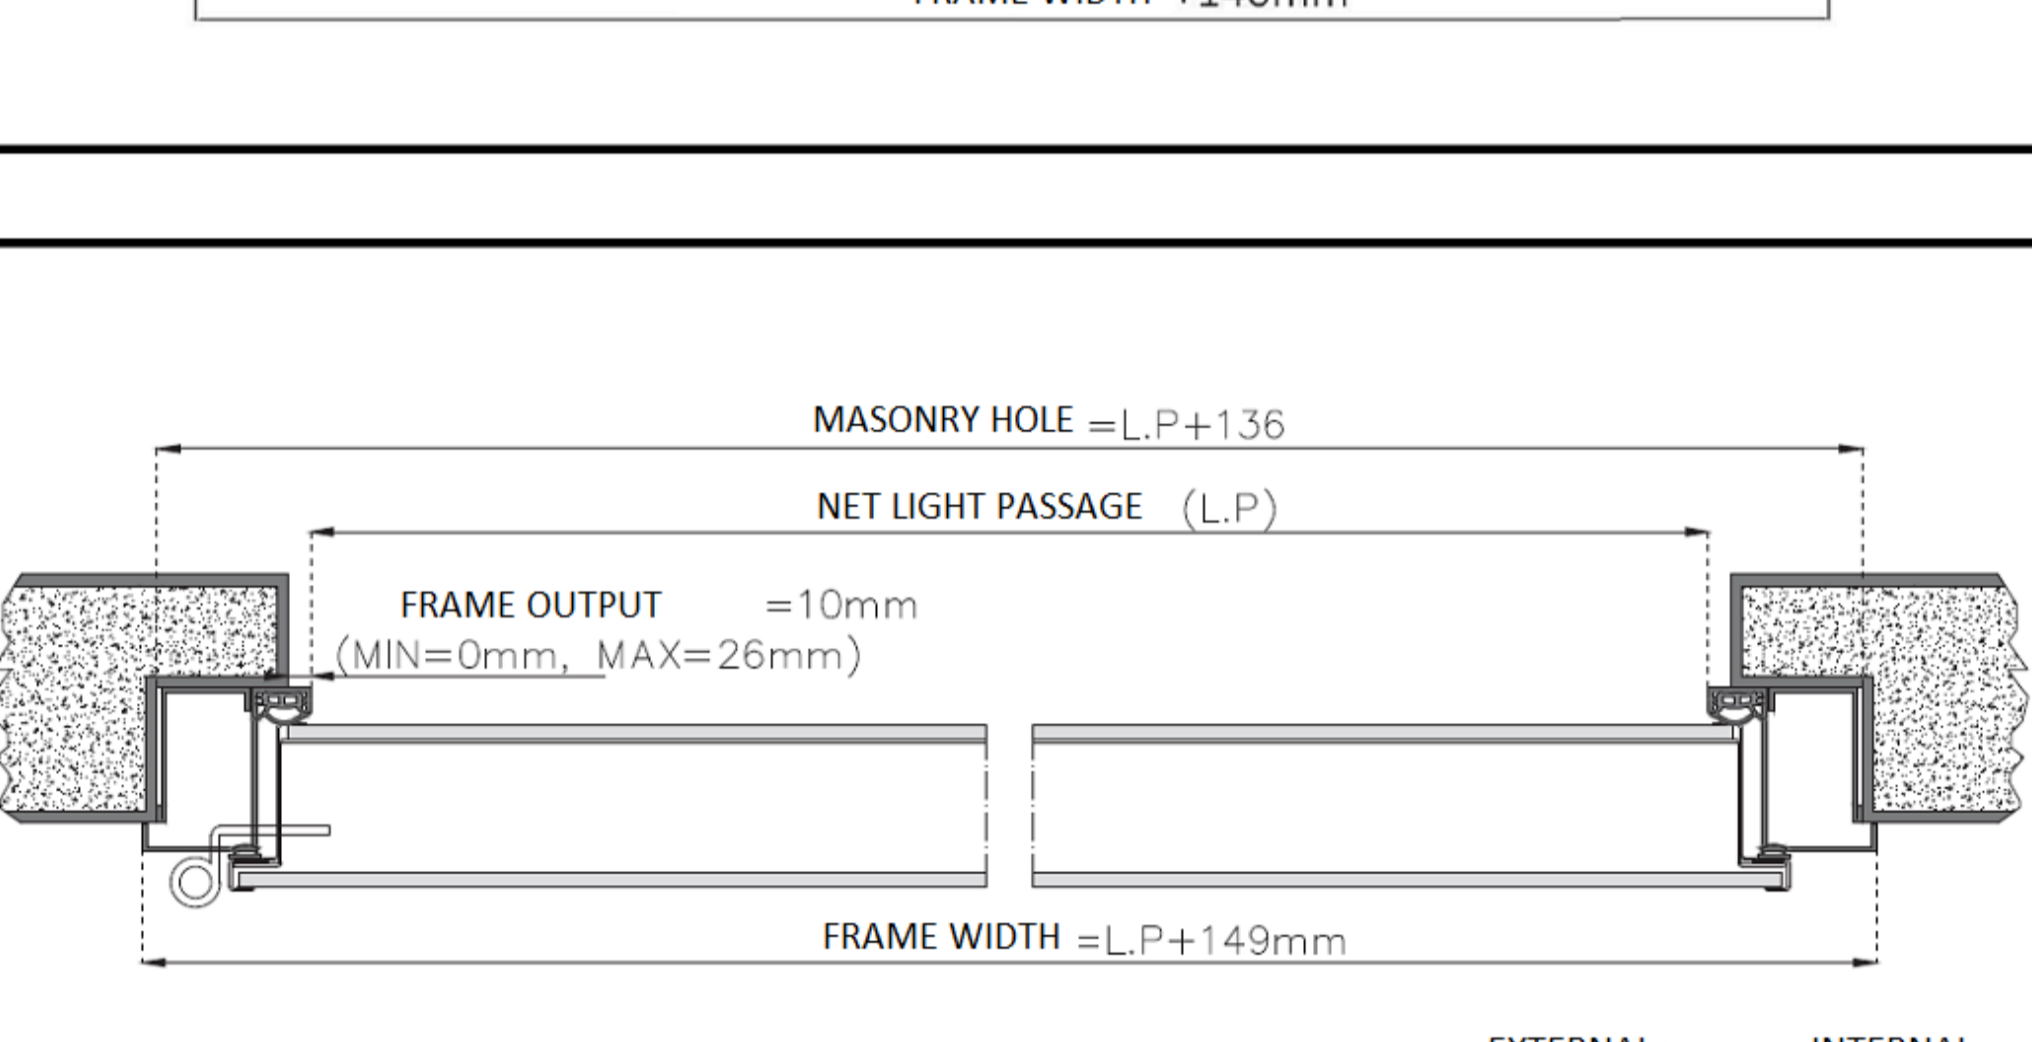

#### FRAME MODEL 1

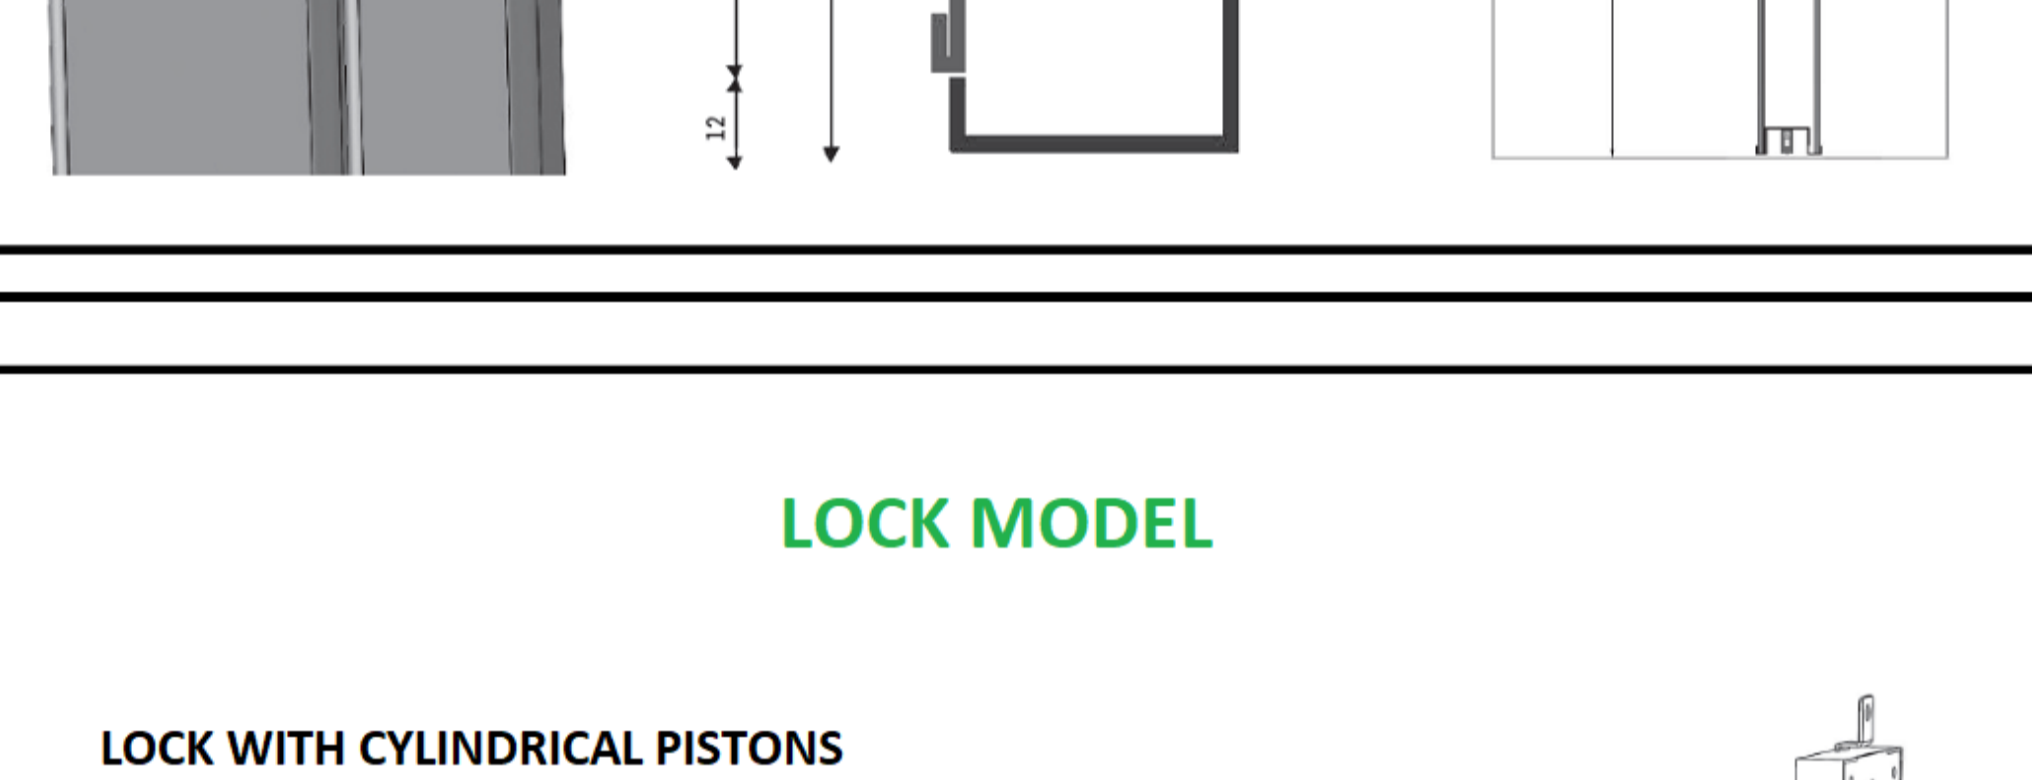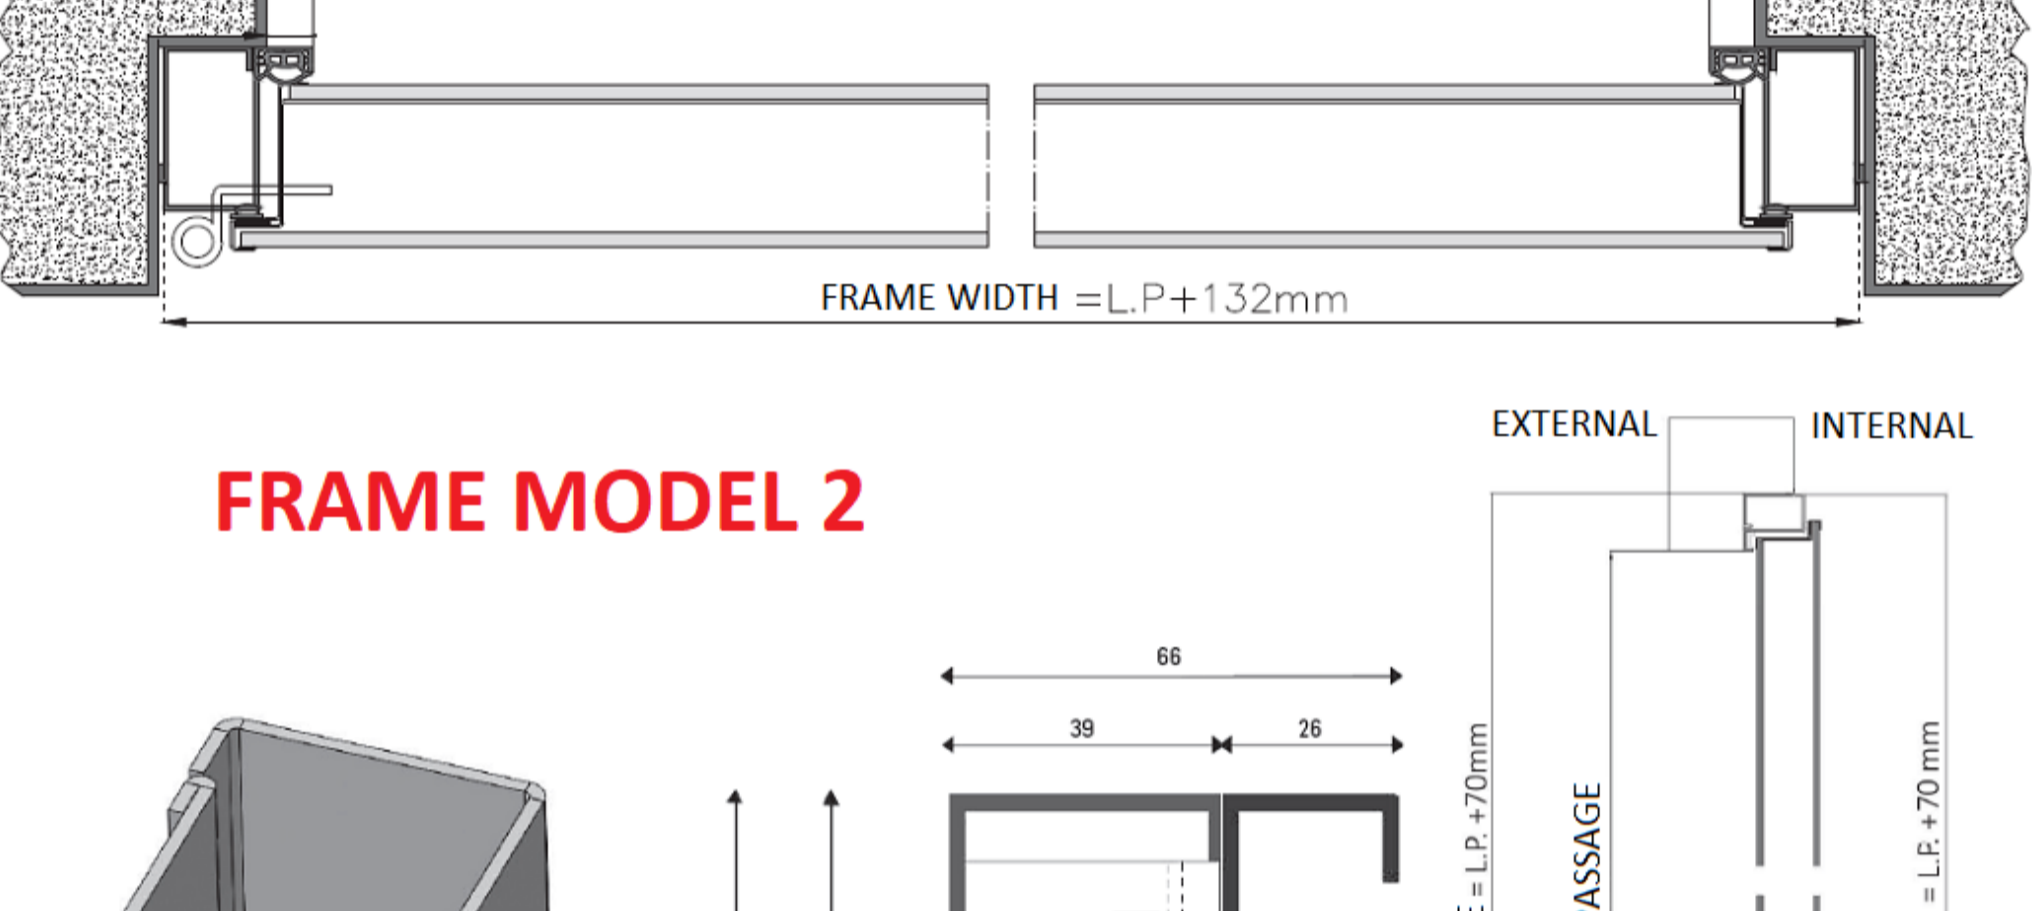

#### FRAME MODEL 2

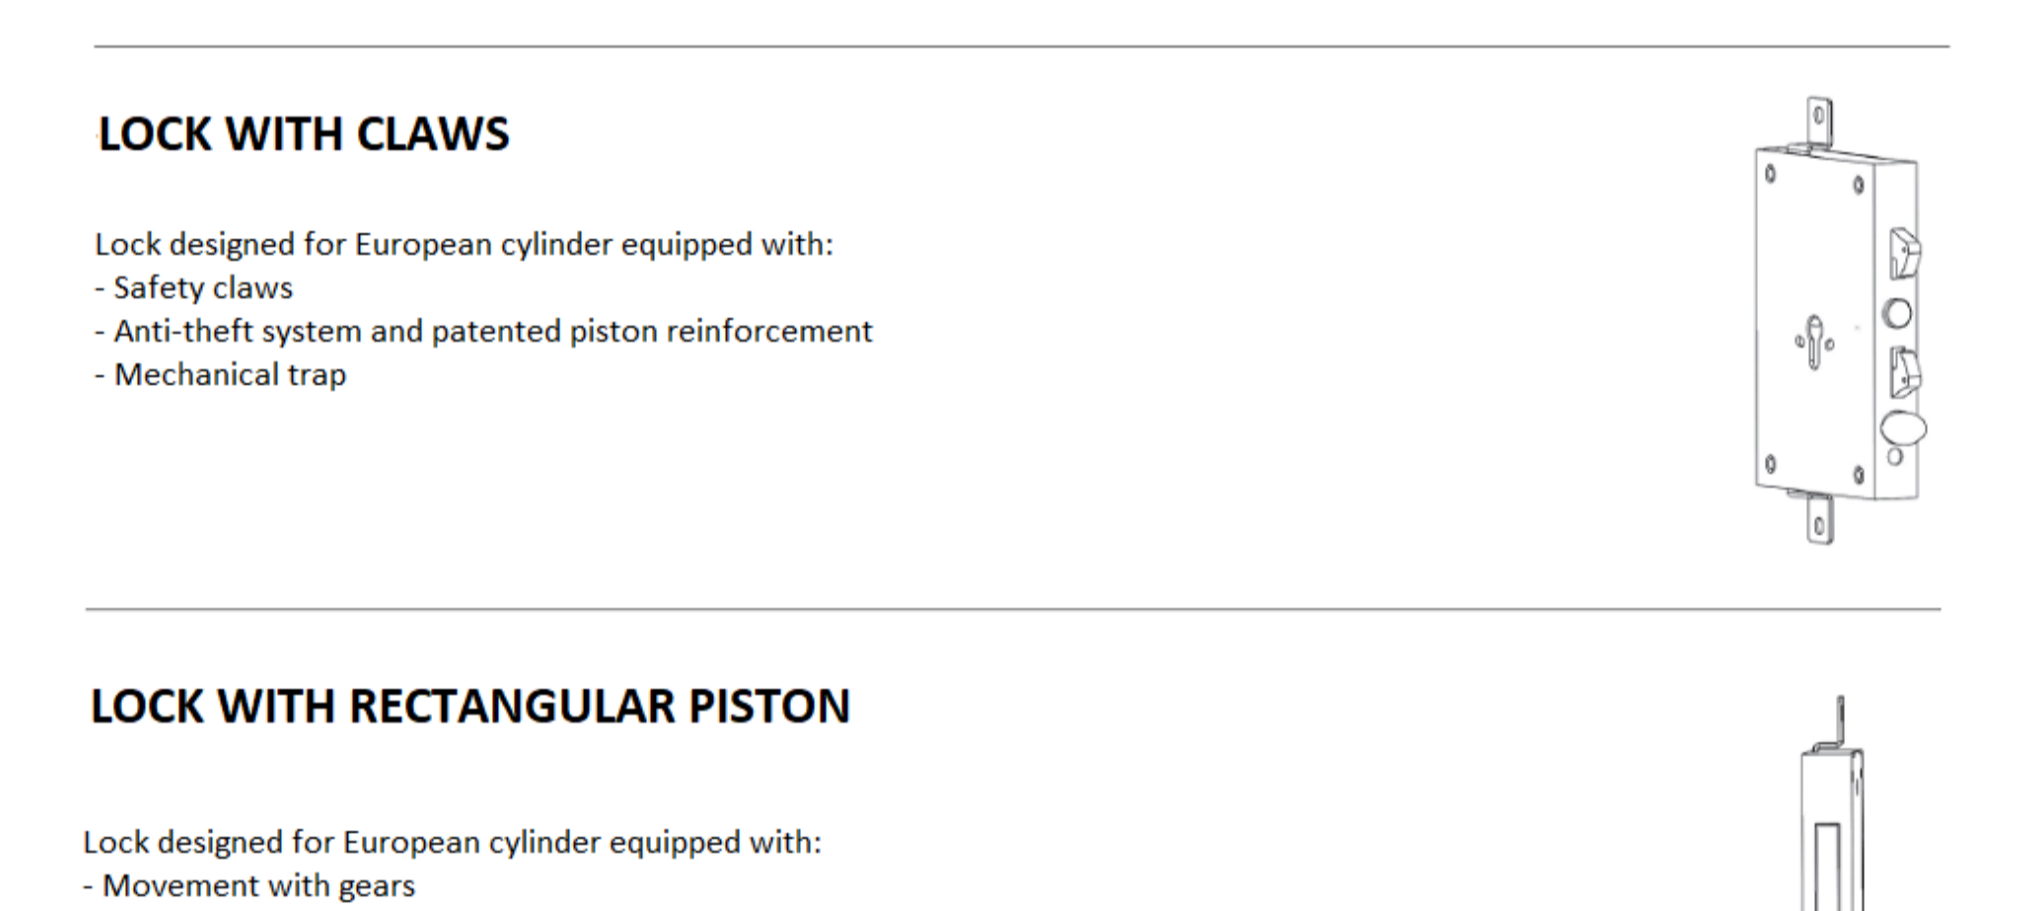

## LOCK MODEL

### LOCK WITH CYLINDRICAL PISTONS

- Lock designed for European cylinder equipped with:
  - Movement with gears
  - Cylindrical pistons
  - Mechanical trap



### LOCK WITH CLAWS

- Lock designed for European cylinder equipped with:
  - Safety claws
  - Anti-theft system and patented piston reinforcement
  - Mechanical trap




### LOCK WITH RECTANGULAR PISTON

- Lock designed for European cylinder equipped with:
  - Movement with gears
  - Rectangular safety piston
  - Anti-theft system and patented piston reinforcement
  - Mechanical trap



### ELECTRIC LOCK

- Lock designed for European cylinder equipped with:
  - Activation device via gear system which reduces the effort on the key
  - Steel box with zinc coating
  - High resistance galvanized reversible latch
  - Pistons in high resistance galvanized steel
  - Voltage 12V ac VA 15 min.
  - Absorbed current 3.1A

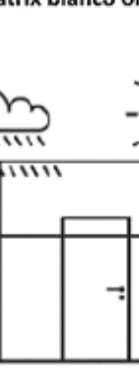

## FLOOR CLOSURE


### EDGE TO THE GROUND

### ADJUSTABLE WINDPROOF




OUTER EDGE OF THE STRUCTURE 10 50


## LAMINATED WOODEN PANEL COLOR

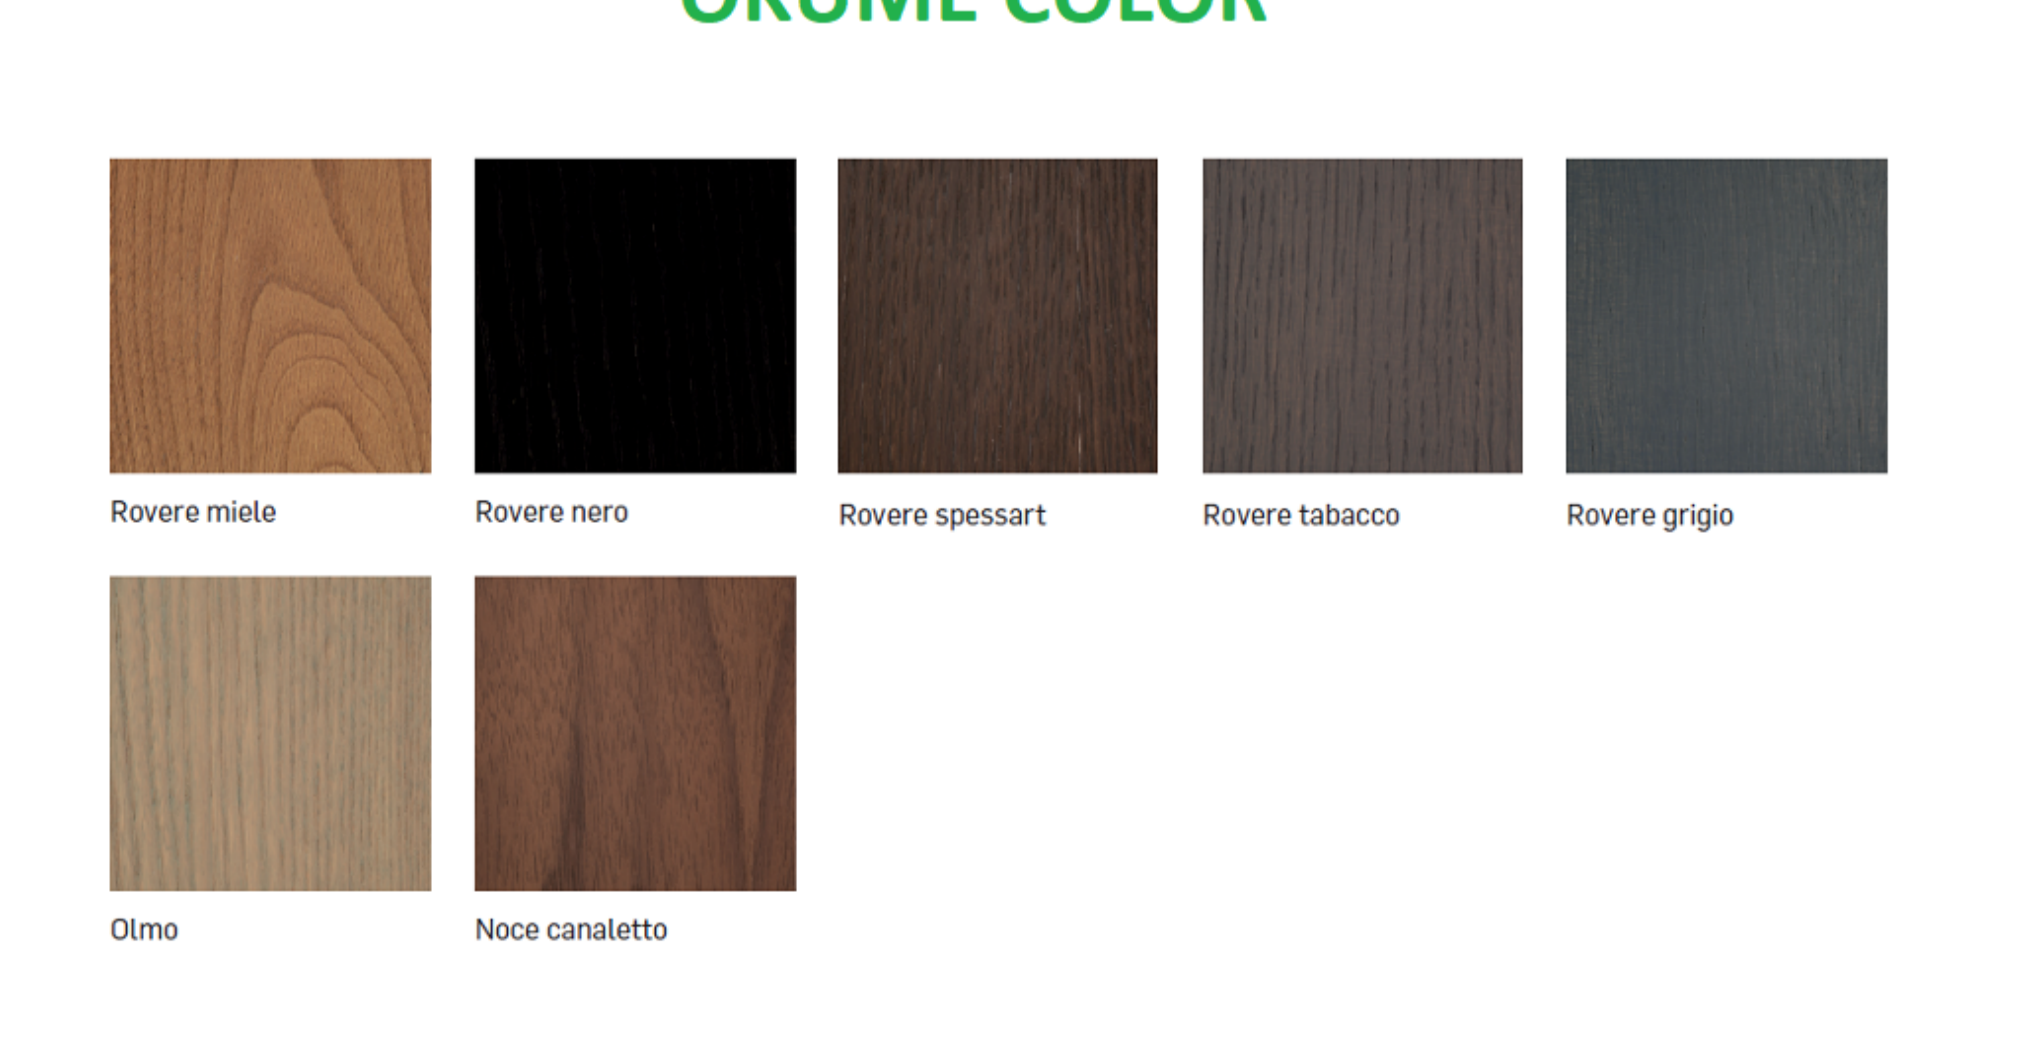

## OKUME PANTOGRAPHED PANELS

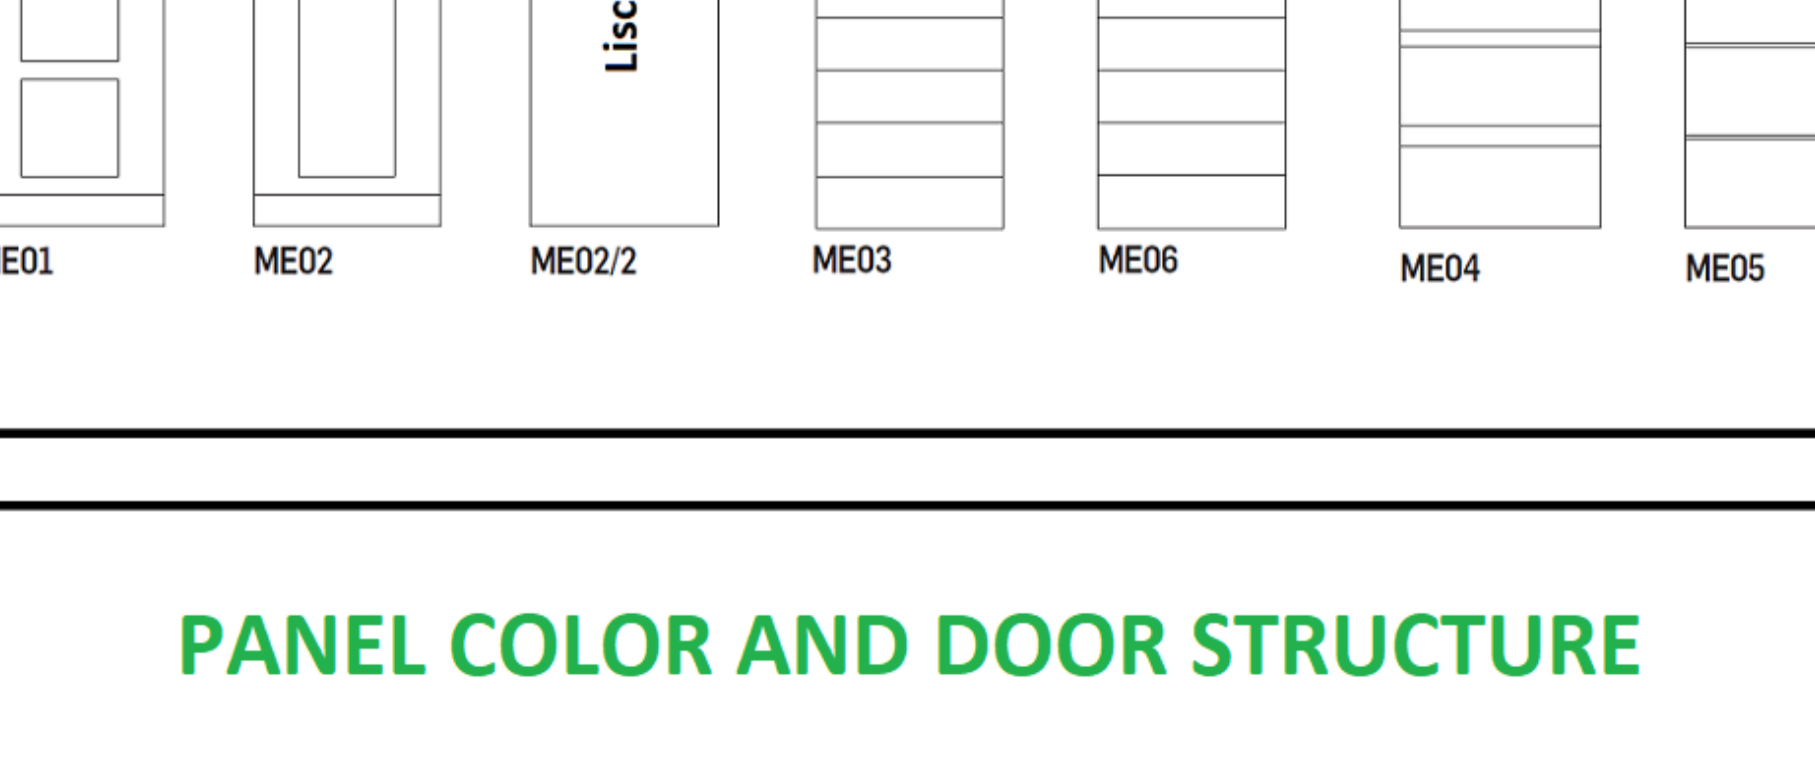

## OKUME COLOR

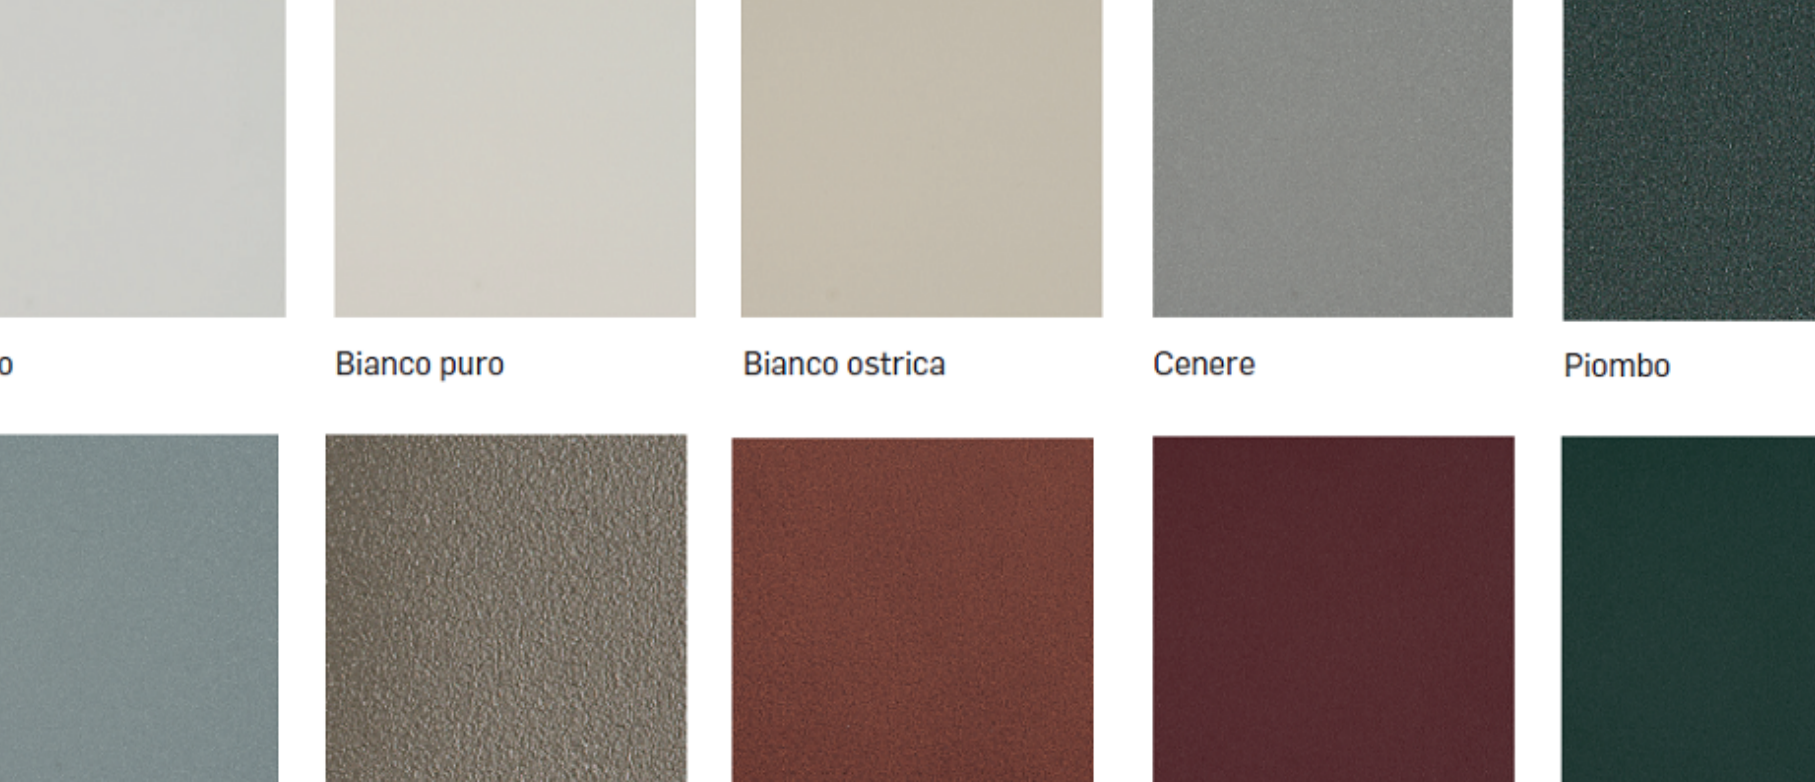

## ALUMINUM PANEL DESIGN



## PANEL COLOR AND DOOR STRUCTURE

